

Two-stage general-purpose filter

FN 660

- Current ratings from 1 to 20A
- High differential and common mode attenuation
- Four choices of output connector
- Optional medical versions (B type)

- Nennströme von 1 bis 20A
 - Gute differentielle und Gleichtakt-Dämpfung
 - Vier Anschlußarten
 - Für medizinische Geräte als Option (Typ B)
- Courants de service de 1 à 20A
 - Bonne atténuation en modes différentiel et commun
 - Quatre types de connexions de sortie
 - Version pour appareils médicaux en option (type B)



Filter selection table

Choose the family FN xxx with the required current rating and features, and add /?? to determine input/output (line/load) connection style. Example: FN 660-3/07 is a 3A filter with wire connections.


Family	Connections	Current ratings at 40°C (25°) A		Inductance L/L1 mH	Housing	Weight g			
		/03	/06			/03	/06	/07	/10
FN 660 -1 /??		/06	/07	1 (1.15)	3/3	H21	115	125	
FN 660 -3 /??		/06	/07	3 (3.4)	2/2	K1	170	180	
FN 660 -6 /??		/06	/07	6 (6.9)	0.75/0.75	K1	170	180	
FN 660 -10 /??		/06	/07	10 (11.5)	0.45/0.45	K21	230	240	
FN 660 -16 /??	/03	/06		16 (18.4)	0.44/0.44	K2	290	260	290
FN 660 -20 /??	/03	/06		20 (23)	0.48/0.48	L1	600	590	640

Additional specifications

Filter type	Capacitance Cx nF	Capacitance Cy nF	Res. R MΩ	Maximum leakage μA/phase	Maximum operating voltage VAC Hz	Operating frequency Hz	Hipot test voltage PN→E VAC P→N VAC
Standard types	150	2.2	1	190	250 50/60	DC to 400	2000 1700
B types (medical)	150		1	2	250 50/60	DC to 400	2500 1700

MTBF at 40°C, 230V, per Mil-HB-217F: 350,000 hours (for VDE-approved current ratings).

Electrical schematic

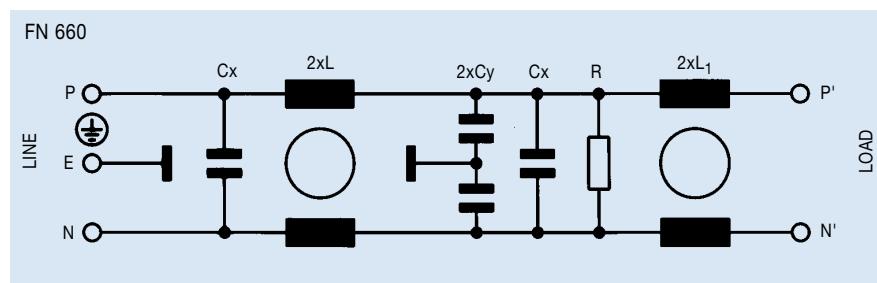


See tables for component values.


FN 660 insertion loss

Per CISPR 17; A = 50Ω/50Ω sym, B = 50Ω/50Ω asym, C = 0.1Ω/100Ω sym, D = 100Ω/0.1Ω sym


1 amp types




3 amp types




6 amp types




10 amp types



16 amp types



20 amp types





Mechanical data

FN 660-1
H21


Tol.
mm

A	71	± 0.5
B	46.6	± 1
C	29	± 1
D	50.5	± 1
F	61	± 0.2
J	21(J1) 8.5(J2)	± 0.5
K	10.5	± 0.3
L	19	± 0.5
M	5.3	± 0.1
N	6.3	± 0.1
Y	6	± 1
Z	140	+ 5

Front view



Top view

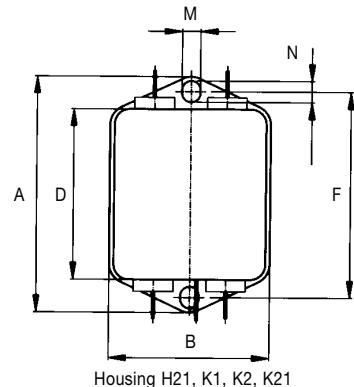

FN 660
-3-6


FN 660
-10-16

FN 660
-20


Tol.*
mm

K1	K2, K21	L1	
A	85	105	± 0.5
B	54	99.5 ± 1	± 0.5
C	30	40	± 1
D	65	84.5	± 1
E		79	± 0.5
F	75	95	± 0.2
G		51	± 0.1
J	27(J1) 8.5(J2)	40	± 0.5
K	7	12	± 0.5
L	29.5	19	± 0.5
M	5.3	4.4	± 0.1
N	6.3	6	± 0.1
W	AWG 16		-
Y	6		± 1
Z	300	140 + 5	+ 10

Front view

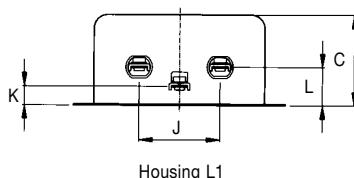

Top view

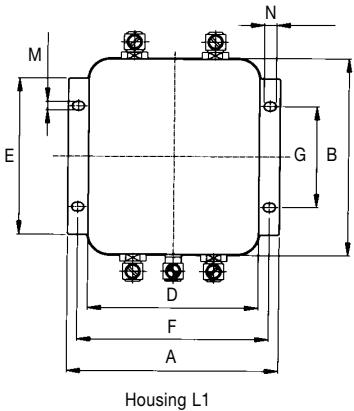

* Measurements share this common tolerance unless otherwise stated.

All dimensions in mm; 1 inch = 25.4 mm