### EMC Components

⊗TDK

#### Common mode filters

Automobile ultra high-speed differential signal line (for infotainment) ACM-H series



### AEC-Q200

# ACM2012H-T03 type




#### FEATURES

- $\bigcirc$  Highly reliable with a temperature range of -40 to +105°C.
- O Common mode EMI measure: Possible to suppress waveform common mode EMI without straining the waveform.
- Operating temperature range: -40 to +105°C
- O Compliant with AEC-Q200

#### APPLICATION

- O Radiated noise suppression for car multimedia interfaces (MOST, HDMI, IDB-1394, etc.).
- Portable PC and PC interfaces (USB, IEEE1394)
- ODVC, CD/DVD-ROM, etc.
- O Application guides: Car Infotainment

#### PART NUMBER CONSTRUCTION



#### CHARACTERISTICS SPECIFICATION TABLE

Common impedanc		DC resistance	Rated current	Rated voltage	Insulation resistance	Cutoff frequency	Characteristic impedance	Part No.
[at 100MH	-Iz]	[1 line]						
<b>(</b> Ω <b>)min.</b>	<b>(</b> Ω <b>)typ.</b>	<b>(</b> Ω <b>)max.</b>	(mA)max.	(V)max.	<b>(M</b> Ω <b>)</b> min.	(GHz)typ.	<b>(</b> Ω <b>)typ.</b>	
65	90	0.30	300	50	10	5	100	ACM2012H-900-2P-T03

#### Measurement equipment

Measurement item	Product No.	Manufacturer
Common mode impedance	4991A	Keysight Technologies
DC resistance	4338A	Keysight Technologies
Insulation resistance	4339A	Keysight Technologies


\* Equivalent measurement equipment may be used.



20210506

# ACM2012H-T03 type

#### ■ IMPEDANCE VS. FREQUENCY CHARACTERISTICS

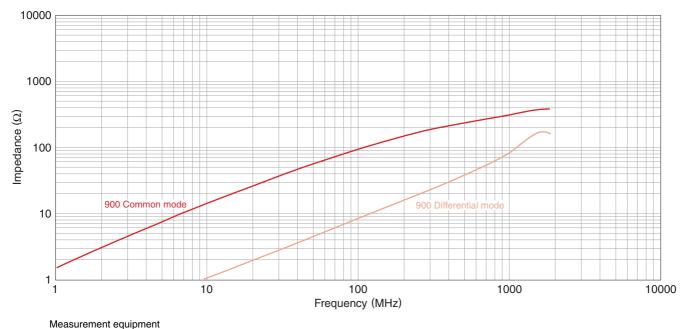


Product No.	Manufacturer	
4991A	Keysight Technologies	

\* Equivalent measurement equipment may be used.

Please be sure to request delivery specifications that provide further details on the features and specifications of the products for proper and safe use.
(2/4)
Please note that the contents may change without any prior notice due to reasons such as upgrading.
20210506

# ACM2012H-T03 type

#### SHAPE & DIMENSIONS




Dimensions in mm


#### RECOMMENDED LAND PATTERN



Dimensions in mm


### CIRCUIT DIAGRAM



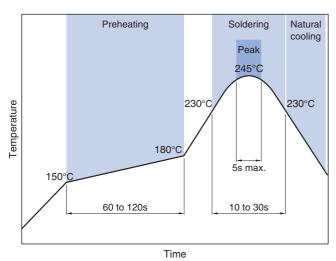


#### RECOMMENDED REFLOW PROFILE


#### PACKAGING STYLE

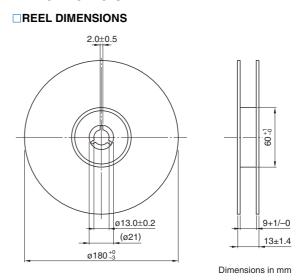


#### TAPE DIMENSIONS

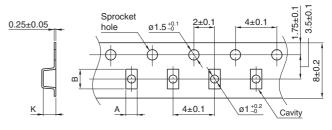

Dimensions in mm



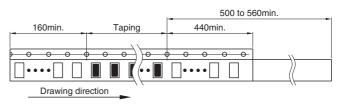

Dimensions in mm

#### **PACKAGE QUANTITY**

Package quantity	2,000 pcs/reel
------------------	----------------

#### TEMPERATURE RANGE, INDIVIDUAL WEIGHT

perature range*	weight
40 to +105 °C	10 mg
	40 to +105 °C

\* The storage temperature range is for after the assembly.

Please be sure to request delivery specifications that provide further details on the features and specifications of the products for proper and safe use. (3/4) Please note that the contents may change without any prior notice due to reasons such as upgrading.

## **REMINDERS FOR USING THESE PRODUCTS**

Before using these products, be sure to request the delivery specifications.

## SAFETY REMINDERS

Please pay sufficient attention to the warnings for safe designing when using this products.

<ul> <li>The storage period is less than 6 months. Be sure to follow the stora less).</li> <li>If the storage period elapses, the soldering of the terminal electrode</li> </ul>				
O Do not use or store in locations where there are conditions such as				
<ul> <li>Before soldering, be sure to preheat components.</li> <li>The preheating temperature should be set so that the temperature does not exceed 150°C.</li> </ul>	difference between the solder temperature and chip temperature			
<ul> <li>Soldering corrections after mounting should be within the range of the If overheated, a short circuit, performance deterioration, or lifespan st</li> </ul>	-			
O When embedding a printed circuit board where a chip is mounted to the overall distortion of the printed circuit board and partial distortion				
<ul> <li>Self heating (temperature increase) occurs when the power is turn design.</li> </ul>	ed ON, so the tolerance should be sufficient for the set thermal			
<ul> <li>Carefully lay out the coil for the circuit board design of the non-magn A malfunction may occur due to magnetic interference.</li> </ul>	ietic shield type.			
$\bigcirc$ Use a wrist band to discharge static electricity in your body through	the grounding wire.			
$\bigcirc$ Do not expose the products to magnets or magnetic fields.				
O Do not use for a purpose outside of the contents regulated in the del	livery specifications.			
<ul> <li>The products listed on this catalog are intended for use in general ment, home appliances, amusement equipment, computer equipment, industrial robots) under a normal operation and use condition. The products are not designed or warranted to meet the requirement ity require a more stringent level of safety or reliability, or whose failuperson or property.</li> <li>If you intend to use the products in the applications listed below or if set forth in the each catalog, please contact us.</li> </ul>	tent, personal equipment, office equipment, measurement equip- ts of the applications listed below, whose performance and/or qual- ure, malfunction or trouble could cause serious damage to society,			
<ul> <li>(1) Aerospace/aviation equipment</li> <li>(2) Transportation equipment (cars, electric trains, ships, etc.)</li> <li>(3) Medical equipment</li> <li>(4) Power-generation control equipment</li> <li>(5) Atomic energy-related equipment</li> <li>(6) Seabed equipment</li> <li>(7) Transportation control equipment</li> <li>When designing your equipment even for general-purpose applications tection circuit/device or providing backup circuits in your equipment.</li> </ul>	<ul> <li>(8) Public information-processing equipment</li> <li>(9) Military equipment</li> <li>(10) Electric heating apparatus, burning equipment</li> <li>(11) Disaster prevention/crime prevention equipment</li> <li>(12) Safety equipment</li> <li>(13) Other applications that are not considered general-purpose applications</li> <li>s, you are kindly requested to take into consideration securing pro-</li> </ul>			

A Please be sure to request delivery specifications that provide further details on the features and specifications of the products for proper and safe use. (4/4) Please note that the contents may change without any prior notice due to reasons such as upgrading.