

THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

Material	High Conductivity Seamless Copper Tube Electro-Tin 8 AWG Stranded Copper; Class B: Compact, Compressed or Concentric, Class C: Concentric 1/2 in. 1/4 in.		
Plating			
Wire Size			
Wire Type			
Wire Strip Length			
Stud Size			
UL Listed Wire Connector	Yes, for applications up to 35kv. Consult cable manufacturer for voltage stress relief instructions with applications greater than 2000 volts.		
UL Temperature Rating	90°C		
C.S.A Certified Wire Connector	Yes		
Panduit Color Code on Barrel	RED		
Panduit Die Index No. on Barrel	P21		
Alternate Industry Die Index No. () on Barrel	N/A		





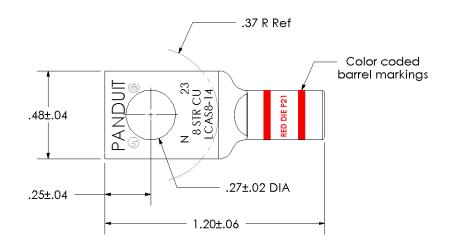

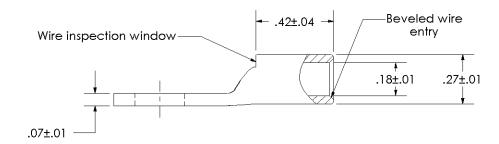

REV	DATE	BY	снк	DESCRIPTION	ECN	N/A DRAWING NO / CAD FILE LCASS-14-CUST
01	3-04	PWS	PWS	REMOVED PANDUIT FROM BARREL MARKINGS	10790	Copper Lug - One-Hole, Short Barrel
						LCAS8-14-L
						CORP. TINLEY PARK, ILLINOIS