


www.hammondmfg.com

229C40


Power Transformer - Dual Primary
Low Voltage PC Board Mount - Low Profile

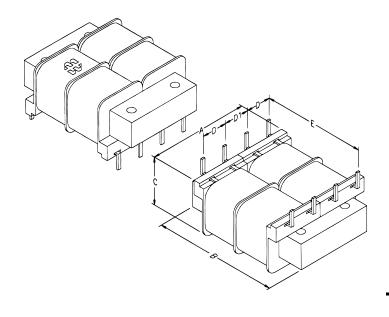


Features

- Low profile mounting, dual split bobbin design.
- Low primary to secondary coupling, balanced windings, no electrostatic shield required and low EMF radiation due to semi-toroidal design.
- Universal dual primary 115/230V 50/60 Hz.
- High insulation Hipot of 1,750V RMS.
- · Class B insulation 130 degrees C.
- · C UL US recognized.


Connection Information - 229 Series Transformers




Primary Connections - 229 Series Transformers



Secondary Connections - 229 Series Transformers





2.25" (57 mm) 2.87" (73 mm) 1.25" (32 mm) D 0.60" (15 mm) D1 0.53" (13 mm) 1.90" (48 mm) 1.50" (38 mm) PC Board Spacing Pin Size 0.04" x 0.04" (1 mm x 1 mm) Size (VA) 24 115 /230V, 50 /60Hz Primary Secondary (RMS) Series 40V C.T. @ 600ma 20V @ 1.2A Secondary (RMS) Parallel Regulation 15%